



□ PRESSURE TEMPERATURE RATING

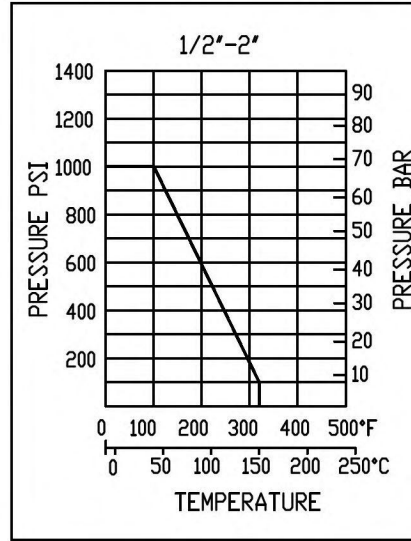


□ MATERIAL OF CONSTRUCTION

ITEM	PARTS	MATERIAL		Qty
1	BODY	A351-CF8M	A351-CF8	1
2	CAP	A351-CF8M	A351-CF8	4
3	BALL	A351-CF8M	A351-CF8	1
4	SEAT	RPTFE	RPTFE	4
5	GASKET	RPTFE	RPTFE	4
6	THRUST WASHER	PTFE	PTFE	1
7	O-RING	VITON	VITON	1
8	STEM PACKING	PTFE	PTFE	1
9	RING	AISI 304	AISI 304	1
10	BEVEL WASHER	AISI 301	AISI 301	2
11	STOP PIN	AISI 304	AISI 304	1
12	NUT	AISI 304	AISI 304	1
13	STEM	AISI 316	AISI 316	1
14	HANDLE	AISI 304	AISI 304	1
15	SPRING WASHER	AISI 304	AISI 304	16
16	BOLT	AISI 304	AISI 304	16
17	NUT	AISI 304	AISI 304	1



T PORT



L PORT

□ DIMENSION (M.M.)

∅D	SIZE	DN	ISO-5211	W	H	H1	C	R	L	∅d	TORQUE IN/LBS
21.7	1/2"	15	F03/F04	121	74.0	41.0	9	9	100	11.0	70
27.1	3/4"	20	F03/F04	121	81.0	47.5	9	9	105	15.0	85
33.8	1"	25	F04/F05	137	87.0	57.0	11	11	124	20.0	110
48.6	1-1/2"	40	F05/F07	182	104.0	71.5	14	14	155	32.0	225
61.1	2"	50	F05/F07	182	112.0	79.8	14	14	184	38.0	350

3-WAY BALL VALVE SOCKET WELD END

G.C. SUPPLIES UK LTD
 TEL:+44 (0) 161-681-8114
 FAX:+44 (0) 161-947-0148

SERIES:SV-4HSS-1
 FOUR PIECE THREE WAY MULTI-PORT 1000 WOG
 INDUSTRIAL BALL VALVE SOCKET WELD END

- FEATURES:
- *BLOW-OUT PROOF STEM SOLID BALL
 - *HANDLE WITH LOCKING DEVICE
 - *INVESTMENT CAST STAINLESS STEEL OR CARBON STEEL
 - *SOCKET WELD END TO ANSI B16.11
 - *BALL: T-PORT AND L-PORT
 - *LONG-NECK ISO 5211 MOUNTING PAD ENABLES TO INSTALL ACTUATOR DIRECTLY
 - *SIZE: AVAILABLE FROM 1/2" ~ 2"

加工一般公差	
尺寸	公差
0-25	±0.13
26-50	±0.25
51-75	±0.38
76-100	±0.48
101-125	±0.55
126-150	±0.63
151-175	±0.71
176-200	±0.9