


# ETG 3WCF/B-L / ETG 3WCF/B-T

## 3-Way Sanitary Weld End Direct Mount Ball Valve L-Port/ T-Port

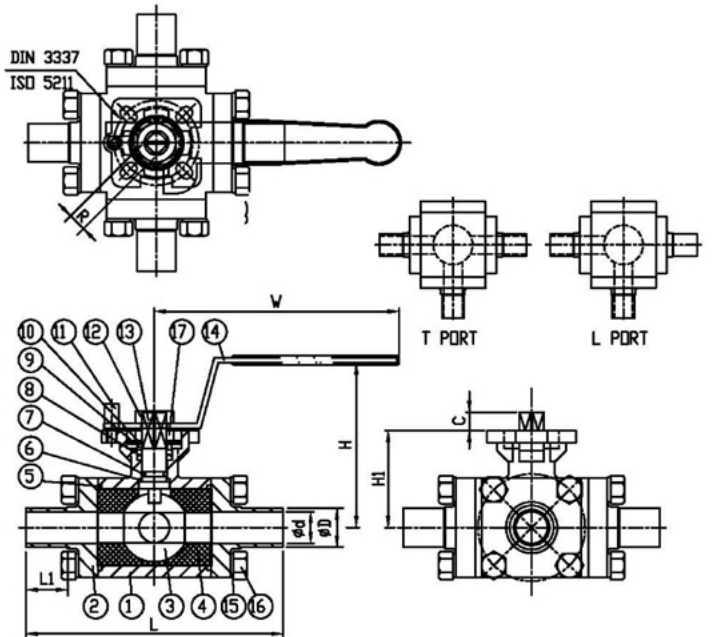

- ASTM A351 CF8M 316 Stainless Steel construction, 316 Trim.
- Virgin PTFE Seals and Cavity Filled Ball Seats.
- ISO 5211 Direct Mounting Pad and Square Stem for easy automation.
- Lockable Lever. Mirror Polished Bore. Ends to suit Imperial O/D Tube.
- Valves are Full Bore (except 4") and are therefore suitable for use on Piggid pipework.



**100mm high Spindle Extension for Insulation & Actuation**  
RJT, DIN, 3A, SMS and IDF end connections can be supplied on short lead times.

T-Clamp ends available as standard (sizes 1/2" - 3") see ETG 3WCF/C-T (T-Port).

Heating Jacket can be fitted to base of valve only.

Available size range: 1/2" - 4"

Item	Part	Material	Qty.
1	Body	A351-CF8M	1
2	Cap	A351-CF8M	4
3	Ball	A351-CF8M	1
4	Seat	PTFE	4
5	Gasket	PTFE	2
6	Thrust Washer	PTFE	1
7	O-Ring	FKM	1
8	Stem Packing	PTFE	1
9	Ring	AISI 316	1
10	Bellville Washer	AISI 301	2
11	Stop Pin	AISI 316	1
12	Nut	AISI 304	1
13	Stem	AISI 316	1
14	Handle	AISI 304	1
15	Spring Washer	AISI 304	16
16	Bolt	AISI 304	16
17	Washer	AISI 304	1
18	Nut	AISI 304	1

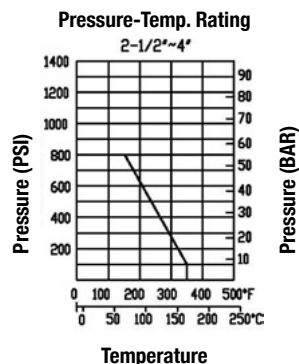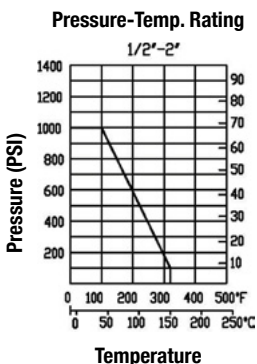

SIZE	DN	ISO5211	W	H	H1	C	R	L	L1	øD	ød	Torque/ INLB
1/2"	15	F03/F04	121	78	44.5	9	9	118	20	12.7	9.5	85
3/4"	20	F03/F04	121	82	48	9	9	127	20	19.1	15.8	90
1"	25	F04/F05	137	90	59	11	11	152.4	25	25.4	22.2	150
1-1/2"	40	F05/F07	182	110	72	14	14	175	25	38.2	35	350
2"	50	F05/F07	182	114.7	82	14	14	190	25	50.8	47.6	780
2-1/2"	65	F07/F10	370	108	100	17	17	228	25	63.4	60	1060
3"	80	F10/F12	400	134	125.5	23	22	260	25	76.2	73	1750
4"	100	F10/F12	400	156	135.5	23	22	318	50	101.6	97.4	1900